

# RB09 CHAIN WINDER

## FEATURES & BENEFITS

- Patent protected snap-lock chain assembly to reduce fabrication time by up to 75%.
- Patent protected Easy-Lock Idler with industry leading onsite adjustment.
- Easy Lift Spring Booster achieves a lighter lifting solution, can also be retrofit on site.
- Heavy Duty bracket adaptor available for commercial use.
- Premium component design ensure a smooth and easy shade solution in a high polish finish.
- Chain Guide is designed for optimal double bracket user experience and the Direct Chain Guide can be installed in fixed or swivel configurations.
- RB09 Geared chain winder provides a cost-effective solution to reduce user effort by up to 40% (shade is lighter to lift).



**COLOUR RANGE**

- black
- pure white
- sandstone
- barley
- silver grey

**WEBPAGE LINK**

**HARDWARE**  
**10 YEAR WARRANTY**

**RB09 CHAIN WINDER OPTIONS**

*DIRECT*

*GEARED*

**HARDWARE CONTROLS**


**BRACKETS**

**TUBES**

**BOTTOM RAILS**

## KEY SYSTEM FEATURES


### SNAP-LOCK CHAIN ASSEMBLY

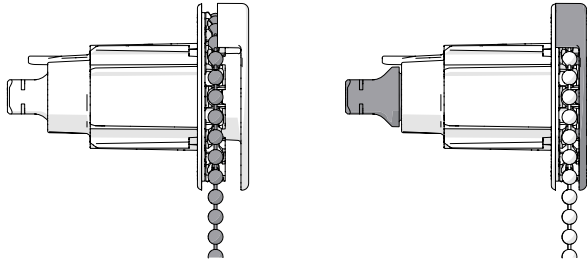

1. Add Chain.


2. Push Cover In.

### RB09 DIRECT | FIXED OR SWIVEL OPTIONS

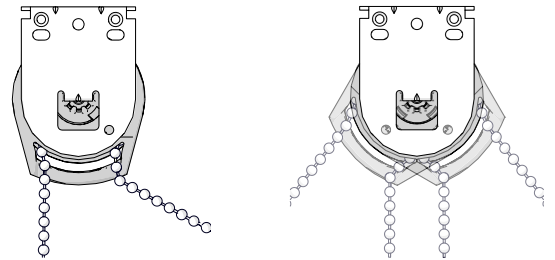


Swivel is ideal for installations above furniture & appliances.

### 10mm INSTALLATION ADJUSTMENT

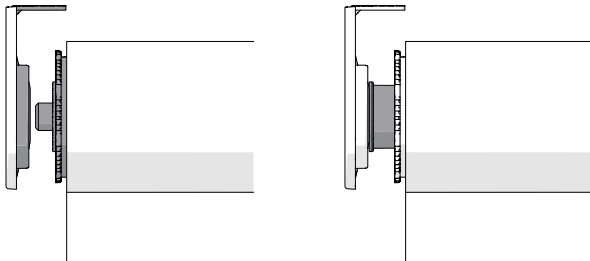

Rotate disk clockwise to extend the pin in 1mm increments.

### RB09 GEARED | ECONOMICAL LIGHTER LIFT SOLUTION

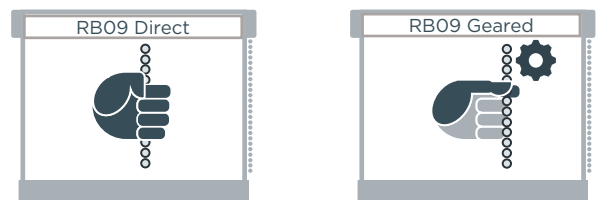

Cost effective solution to reduce user effort by up to 40%.

## SYSTEM UPGRADES

S45 TO S60

WIRE GUIDE

EASY-LINK

MOUNTING RAIL


FRS VALANCE

P95 PELMET

CF90

# RB09 SPECIFICATIONS

## TUBE CAPACITY

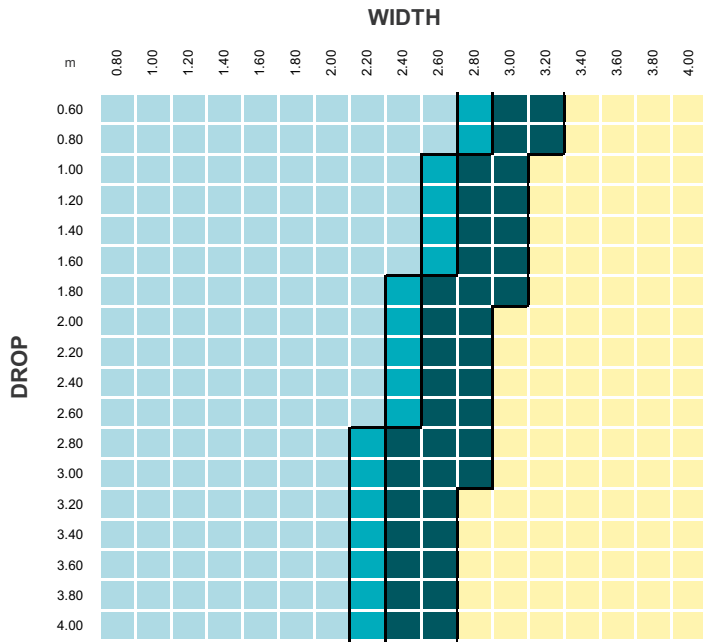


### TUBES

S45   LIGHT	
S45   STANDARD	
S45   HEAVY DUTY	
S45   LINKED	

### PARAMETERS:

FABRIC DENSITY: 390gsm  
 FABRIC THICKNESS: 0.6mm  
 WEIGHT BAR: D30 Bottom Rail  
 TUBE DEFLECTION: 1.05mm/m

## CONTROL CAPACITY

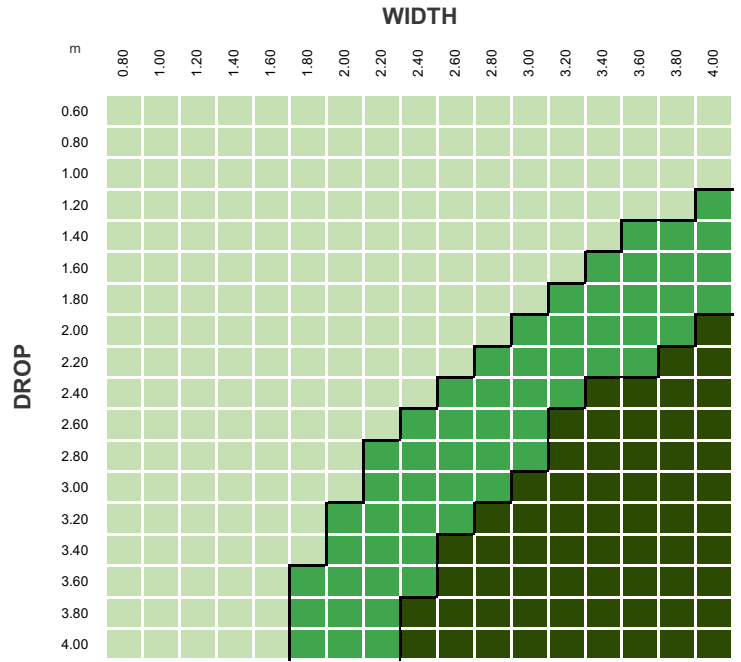

### RB09 CONTROL

	DIRECT OR GEARED
	DIRECT w. BOOSTER OR GEARED
	BOOSTER REQUIRED

### PARAMETERS:


FABRIC DENSITY: 390gsm  
 FABRIC THICKNESS: 0.6mm  
 WEIGHT BAR: D30 Bottom Rail  
 TUBE DEFLECTION: 1.05mm/m

HOLDING CAPACITY	TUBE		
	S45 LT	S45 STD	S45 HD
RB09	4.7kg	4.6kg	4.2kg
STD BOOSTER	9.1kg	8.9kg	8.0kg
HD BOOSTER	13.3kg	13.1kg	11.8kg

Operating shades at maximum holding capacity will not produce comfortable pull forces.


## TECHNICAL DATA

SINGLE BRACKETS	SPECIFICATIONS			MAX ROLL
	PITCH	WIDTH	HEIGHT	
LX	40mm	50mm	65mm	75mm
	55mm	50mm	80mm	105mm



CONTROL OPTIONS	MINIMUM SHADE WIDTH (no covers)	TUBE DEDUCTIONS	
		NO BRACKET COVERS	WITH BRACKET COVERS
RB09	150mm	28mm	31mm
RB09 Geared	150mm		
+ STD BOOSTER	817mm		
+ HD BOOSTER	937mm		

Minimum Shade Width based on 5mm gap between hardware in tube.

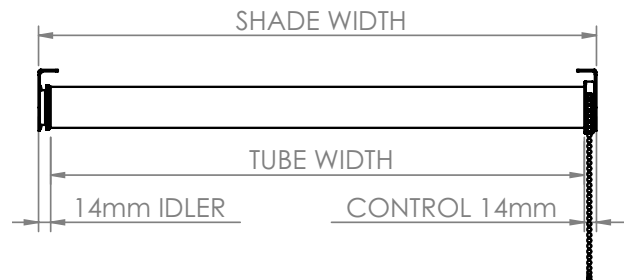

DOUBLE BRACKETS	MAX ROLL	SLIM PROFILE   TOP-FRONT Fabric Roll Options	SLIM PROFILE   TOP-BACK Fabric Roll Options	SQUARE-X Fabric Roll Options	SLIMLINE-X Fabric Roll Options
SLIM PROFILE/SQUARE-X	70mm				
SLIMLINE-X	65mm				